



SK LINE 805

VESSEL PARTICULARS

| | |
|-----------------|---------------------|
| Class | ABS |
| Flag | Malaysia |
| P.O.R | Kuching |
| Year Built | 2012 |
| Builder | Nam Cheong Dockyard |
| | Malaysia |
| IMO | 9498078 |
| Official Number | 333056 |
| Call Sign | 9WPN2 |

DIMENSION

| | |
|-------------|------------|
| L.O.A. | 34.00 m |
| Beam | 8.00 m |
| Depth | 3.30 m |
| Draft (max) | 2.387 m |
| GRT | 217 Tonnes |
| NRT | 65 Tonnes |

CARGO CAPACITIES

| | |
|---------------|---------------------------|
| Deadweight | 46.94 Tonnes |
| Deck Cargo | 10 Tonnes |
| Deck Loading | 3.0 Tonnes/m ² |
| Deck Area | 84 m ² |
| Fresh Water | 43.7 m ³ |
| Ballast Water | 15.16 m ³ |
| Fuel Oil | 60.3 m ³ |
| Dispersant | 7.18 m ³ |
| Foam | 1.40 m ³ |

ACCOMMODATION

| | |
|-------------|-----------|
| 1 Man Cabin | 2x 1 (2) |
| 3 Men Cabin | 2x 3 (6) |
| 4 Men Cabin | 1x 4 (4) |
| Total | 12 berths |

PERFORMANCE

| | |
|-------|----------|
| Speed | 10 knots |
|-------|----------|

34M GENERAL PURPOSE VESSEL 1440 BHP | HALF FIFI | 12 MEN | 84 m²



PROPULSION & POWER PLANT

| | |
|----------------|---------------------------------|
| Propellers | 2x 537KW Fixed Pitch Propellers |
| Bow Thruster | 1x 1.0T Thrust each |
| Main Engine | 2x 537KW 1800 rpm |
| Main Generator | 2x 80KW, 415V3Ph50Hz |

DECK MACHINERY

| | |
|----------|-----------------|
| Tow Hook | 1x 5 Tonnes SWL |
| Capstan | 1x 3 Tonnes SWL |

CARGO HANDLING CAPACITY

| | |
|---------------|--------------------------------------|
| Fresh Water | 1x 13 m ³ /hr @ 20 m head |
| Ballast Water | 1x 30 m ³ /hr @ 30 m head |
| Fuel Oil | 1x 13 m ³ /hr @ 20 m head |

NAVIGATION EQUIPMENT

Radar, Magnetic Compass, Satellite Compasses, GPS, AIS
Echo Sounder, Speed Log, Navtex, BNWAS

COMMUNICATION EQUIPMENT

GMDSS A1+A2, VHF Radios, Intercom System, EPIRB
Public Address, SART

FIRE-FIGHTING EQUIPMENT


| | |
|----------------|--|
| External FiFi | Pump: 1x 1200 m ³ /hr @ 130 MLC |
| (Half-FiFi) | Monitor: 2x 600 m ³ /hr (water) |
| External FiFi | Pump: 1x 50 m ³ /hr @ 100 MLC |
| (Secondary) | Monitor: 1x 50 m ³ /hr (water/foam) |
| Oil Dispersant | 2x 6m spray booms with nozzles |

SAFETY EQUIPMENT

| | |
|-------------|----------|
| Rescue Boat | 1x 6 men |
|-------------|----------|



SK LINE 805 | 34M GENERAL PURPOSE VESSEL

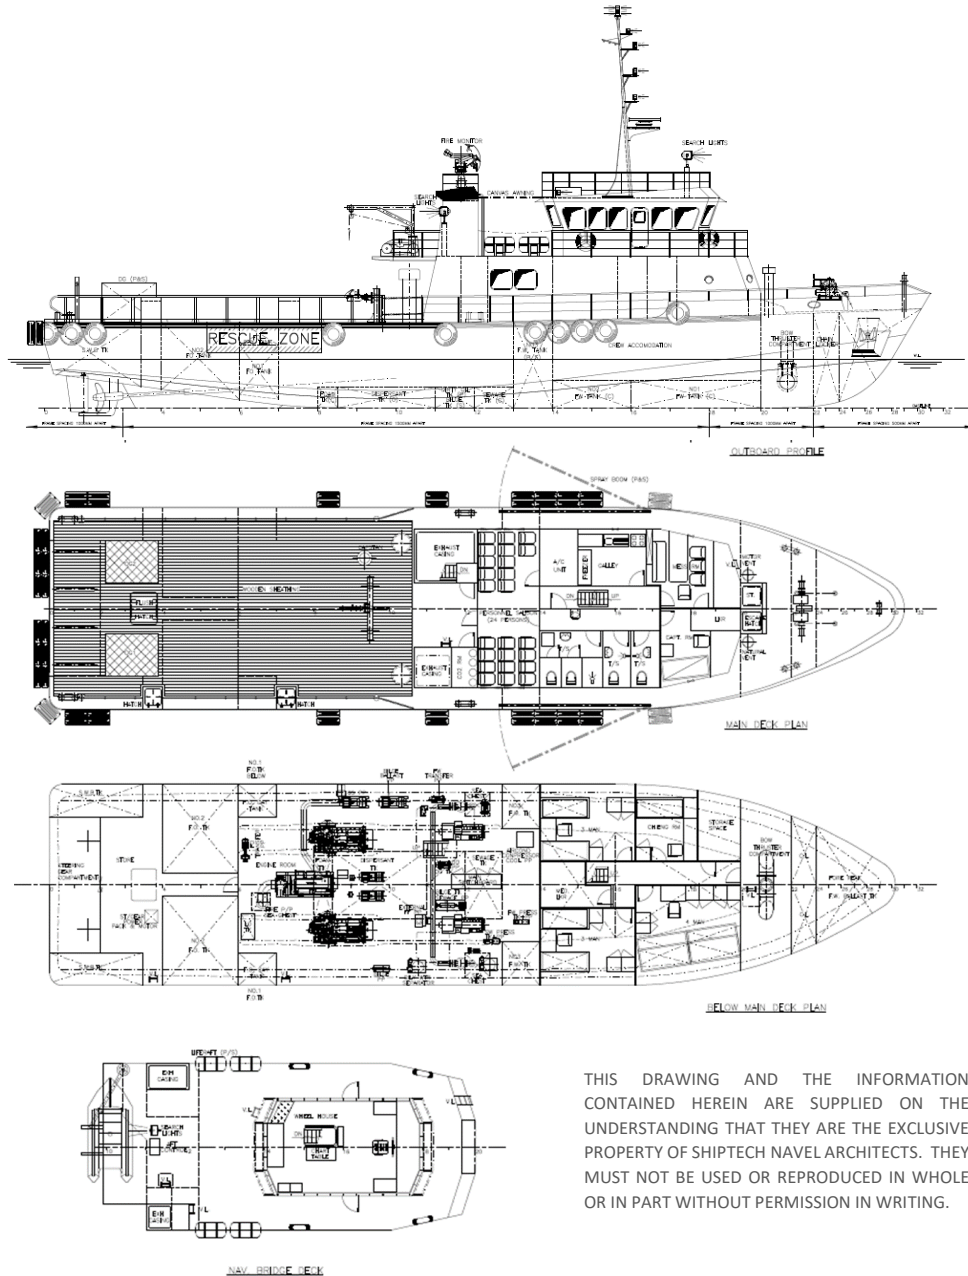

THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE SUPPLIED ON THE UNDERSTANDING THAT THEY ARE THE EXCLUSIVE PROPERTY OF SHIPTECH NAVAL ARCHITECTS. THEY MUST NOT BE USED OR REPRODUCED IN WHOLE OR IN PART WITHOUT PERMISSION IN WRITING.

SKOM SDN BHD (1182610-K)

B03-B-17-1, Menara 3A, No.3, Jalan Bangsar, KL Eco City, 59200 Kuala Lumpur, Malaysia

Tel : +603-2280 6777 | Fax : +603-2201 7778 | www.skom.com

Disclaimer : All information provided here is accurate at the time of printing and may be subject to change without prior notice. While every reasonable care has been taken in preparing this document. SKOM Sdn Bhd will not be held responsible for any inaccuracies.