

# **SK ATOMIK**

# **64.8M ANCHOR HANDLING TUG SUPPLY VESSEL (DIESEL-ELECTRIC)**80T BP | 7643 BHP | DP2 | FIFI 1 | 50 MEN | 420 M<sup>2</sup>

#### **VESSEL PARTICULARS**

Class ABS ♣A1 AH FFV1 OSR-C1

TOW © Supply-HNLS
Offshore Support Vessel

₩AMS ₩DPS-2 UWILD SPS

MLC-ACCOM

Flag Taiwan
P.O.R Kaohsiung
Year Built 2017

Builder Nam Cheong Dockyard,

Malaysia

 IMO
 9721528

 Official Number
 016660

 Call Sign
 BR4775

#### **DIMENSION**

 L.O.A.
 64.80 meter

 Beam
 16.00 m

 Depth
 6.80 m

 Draft (max)
 5.47 m

 GRT
 2332 Tonnes

 NRT
 699 Tonnes

#### **CARGO CAPACITIES**

Deadweight1980 TonnesDeck Cargo650 TonnesDeck Loading7.5 Tonnes/m²

 Deck Area
 420 m²

 Fresh Water
 397 m³

 Drill/Ballast Water641 m³

 Fuel Oil
 640 m³

 Base Oil
 123 m³

 Mud
 411 m³

 Brine
 411 m³

 Dry Bulk
 172 m³

### **ACCOMMODATION**

 1 Man Cabin
 6x 1 (6)

 2 Men Cabin
 8x 2 (16)

 4 Men Cabin
 7x 4 (28)

 Total
 50 berths

 Hospital
 1 berth

# **PERFORMANCE**

Speed 10 knots Bollard Pull 80.422 Tonnes



#### **PROPULSION & POWER PLANT**

Propellers2x 2400kW Azimuth ThrustersBow Thruster2x 560kW, 10T Thrust each

**Propulsion Motor** 2x 2400kW 1200 rpm, 690V3Ph60Hz

Main Generator4x 1425kW, 690V3Ph60HzEmergency Generator1x 200kW, 440V3Ph60Hz

#### **DECK MACHINERY**

Tugger winch2x 10 Tonnes SWLCapstan2x 10 Tonnes SWL

**Provision Crane** 1x 5/7.5 Tonnes SWL @ 15/10 m radius

Telescopic type

AHT Winches 1x Electro-Hydraulic double drum AH/T Winch

Line pull: 150 Tonnes Brake: 250 Tonnes

Drum cap: 1250m x 60mm dia. Wire

Storage Reel 1x 3300m x 60mm dia. Wire

Shark Jaw 1x 200 Tonnes SWL
Towing Pins 1x 115 Tonnes SWL

Stern Roller 1x 4m(L) x 1.8m(dia.) 250Tonnes SWL

#### **CARGO HANDLING CAPACITY**

 Fresh Water
 1x 100 m³/hr @ 80 m head

 Drill Water
 1x 100 m³/hr @ 80 m head

 Fuel Oil
 2x 100 m³/hr @ 80 m head

 Base Oil
 1x 75 m³/hr @ 80 m head

 Mud
 2x 75 m³/hr @ 240 m head

 Brine
 2x 75 m³/hr @ 240 m head


 Dry Bulk
 2x 13m³/min @ 5.6 bar


Water Maker 1x 10 m<sup>3</sup>/day







## SK ATOMIK | 64.8M ANCHOR HANDLING TUG SUPPLY VESSEL

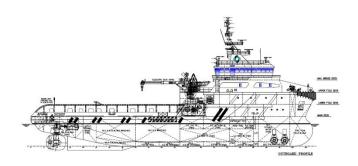


















THIS DRAWING AND THE INFORMATION CONTAINED HEREIN ARE SUPPLIED ON THE UNDERSTANDING THAT THEY ARE THE EXCLUSIVE PROPERTY OF NC DESIGN PTE LTD. THEY MUST NOT BE USED OR REPRODUCED IN WHOLE OR IN PART WITHOUT PERMISSION IN WRITING.

#### **NAVIGATION EQUIPMENT**

Radars, Magnetic Compass, Gyro Compasses, DGPSs, AIS Autopilot, Echo Sounder, Speed Log, Navtex, Weather Fax SSAS, BNWAS

#### **COMMUNICATION EQUIPMENT**

GMDSS A1+A2+A3, VHF Radios, Auto Telephone, EPIRB Public Address, Batteryless Telephone, SART

#### FIRE-FIGHTING EQUIPMENT

External FiFi Pump: 2x 1700 m<sup>3</sup>/hr @ 130 MLC

Monitor: 1x 1200 m³/hr (water/foam)

Monitor: 1x 1200 m<sup>3</sup>/hr (water)

Oil Dispersant 2x 6m spray booms with nozzles

#### **SAFETY EQUIPMENT**

**Rescue Boat** 1x 6 men Fast Rescue Boat

# **SKOM SDN BHD** (1182610-K)

B03-B-17-1, Menara 3A, No.3, Jalan Bangsar, KL Eco City, 59200 Kuala Lumpur, Malaysia Tel: +603-2280 6777 | Fax: +603-2201 7778 | www.skom.com.my

Disclaimer: All information provided here is accurate at the time of printing and may be subject to change without prior notice. While every reasonable care has been taken in preparing this document. SKOM Sdn Bhd will not be held responsible for any inaccuracies.