



SK PALADIN

VESSEL PARTICULARS

Class	BV I Supply vessel Fire-fighting ship -water spraying- Anchor Handling
Flag	Malaysia
P.O.R	Port Kelang
Year Built	2010
Builder	Guangzhou Hangtong Shipbuilding
IMO	9543225
Official Number	334137
Call Sign	9MLD4

DIMENSION

L.O.A.	58.70 m
Beam	14.60 m
Depth	5.50 m
Draft (max)	4.75 m
GRT	1537 Tonnes
NRT	461 Tonnes

CARGO CAPACITIES

Deadweight	1450 Tonnes
Deck Cargo	600 Tonnes
Deck Loading	7 Tonnes/m ²
Deck Area	330 m ²
Fresh Water	228 m ³
Drill/Ballast Water	465 m ³
Fuel Oil	482 m ³
Mud	259 m ³
Dry Bulk	184 m ³

ACCOMMODATION

1 Man Cabin	2x 1 (2)
2 Men Cabin	4x 2 (8)
4 Men Cabin	8x 4 (32)
Total	42 berths
Hospital	1 berth

PERFORMANCE

Speed	10 knots
Bollard Pull	63 Tonnes

60M ANCHOR HANDLING TUG SUPPLY VESSEL

60T BP | 5150 BHP | FIFI 1 | 42 MEN | 360 m²



PROPELLION & POWER PLANT

Propellers	Conventional CPP
Bow Thruster	1x 515kW, 8T Thrust each
Main Engine	2 x 2575 BHP 3516B-HD Caterpillar
Main Generator	3x 450kW, CAT C18
Emerg Generator	1x 65Kw C4.4

DECK MACHINERY







Tugger winch	2x 10 Tonnes SWL
Capstan	2x 5 Tonnes SWL
AHT Winch	1x Electro-Hydraulic Double Drum AH/T Winch
	Line pull: 150 Tonnes
	Brake: 200 Tonnes
	Drum cap: 1000m x 56mm dia. Wire
Storage Reel	1x 1000m x 56mm dia. Wire
Shark Jaw	1x 200 Tonnes SWL
Towing Pins	2x 200 Tonnes SWL
Stern Roller	1x 5m(L) x 1.6m(dia.) 200Tonnes SWL

CARGO HANDLING CAPACITY

Fresh Water	1x 100 m ³ /hr @ 75 m head
Drill Water	1x 100 m ³ /hr @ 75 m head
Fuel Oil	1x 150 m ³ /hr @ 75 m head
Mud	2x 70 m ³ /hr @ 75 m head
Dry Bulk	2x 13 m ³ /min @ 5.6 bar
Water Maker	1x 5 MT/day



SK PALADIN | 60M ANCHOR HANDLING TUG SUPPLY VESSEL

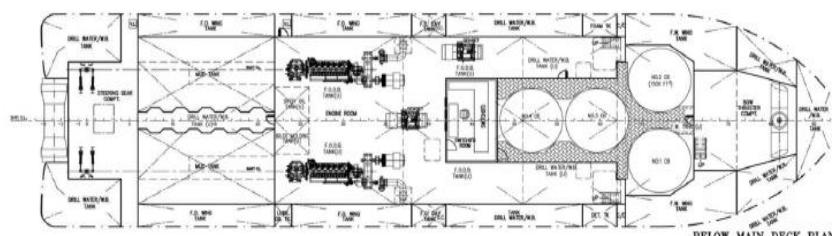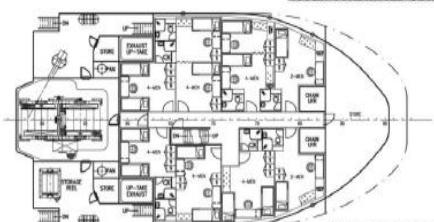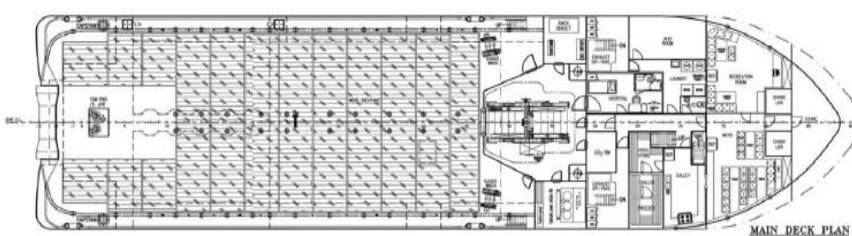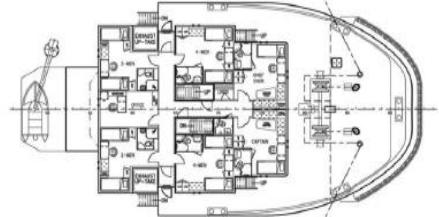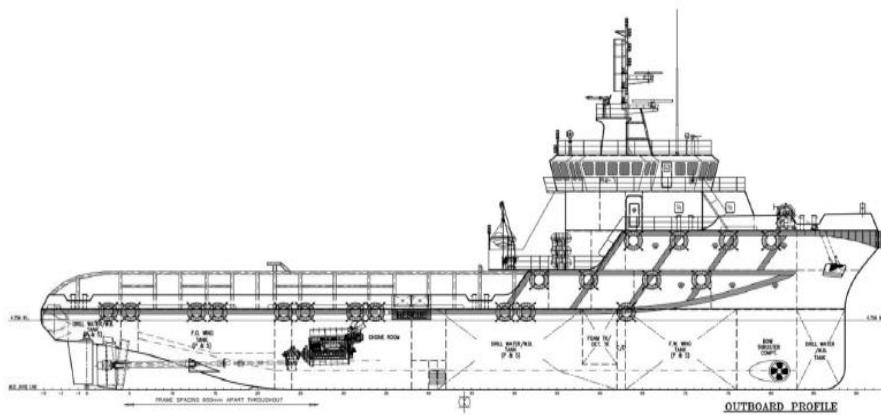

PRINCIPAL DIMENSIONS

LENGTH OVERALL	58.70 M
LENGTH WATERLINE	58.37 M
LENGTH BETWEEN PERPENDICULARS	55.20 M
BREADTH MOORED	14.60 M
DEPTH MOORED	5.50 M
MAX. SHAFT MOORED	4.50 M
ACCOMMODATION	42 MEN
FUEL OIL	475 M ³
FRESH WATER	230 M ³
WATER BALLAST/DRILL WATER	480 M ³
MUD (S.G. - 2.5)	255 M ³
DRY BULK TANKS (4 x 1500 FT ³)	6000 FT ³
CLEAR DECK AREA (DECK LOADING = 7 T/M ²)	374 M ²
TOTAL POWER	2 x 3575 PS
BOILAND FULL SPEED	65 TONS 13.5 KNOTS



NAVIGATION EQUIPMENT

Radar, Magnetic Compass, Gyro Compasses, DGPSs, AIS, Autopilot, Echo Sounder, Speed Log, Navtex, Weather Fax

COMMUNICATION EQUIPMENT

GMDSS A1+A2+A3, VSAT

FIRE-FIGHTING EQUIPMENT

External FiFi Pump: 2x 1500 m³/hr
Monitor: 2x 1200 m³/hr

Oil Dispersant 2x 6m spray booms with nozzles

SAFETY EQUIPMENT

Rescue Boat 1x 6 men Rescue Boat

SKOM SDN BHD (1182610-K)
B03-B-17-1, Menara 3A, No.3, Jalan Bangsar, KL Eco City, 59200 Kuala Lumpur, Malaysia
Tel : +603-2280 6777 | Fax : +603-2201 7778 | www.skom.com

Disclaimer : All information provided here is accurate at the time of printing and may be subject to change without prior notice. While every reasonable care has been taken in preparing this document. SKOM Sdn Bhd will not be held responsible for any inaccuracies.